

ADJUSTING HANDLE ALIGNMENT


To adjust the alignment of the handle in relation to the body, unscrew the bezel and ceramic indices from the top of the handle.

Unscrew the spindle bolt, and set aside with the spindle bolt washer.

Lift the handle off the spindle and replace at the desired angle using the micro adjustment teeth.

Re-attach the washer and spindle bolt and tighten.

Screw the bezel and ceramic indices assembly back onto the handle body.

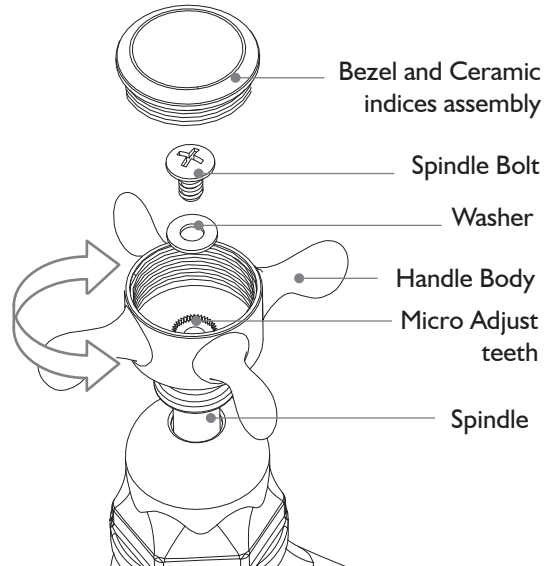


ADJUSTING CERAMIC INDICES

To adjust the alignment of the ceramic indices, first unscrew the bezel and ceramic indices assembly from the tap handle.

The ceramic indices are held in place by a threaded brass plate. Loosen the brass plate with a No. 16 Hex (Allen) Key, but do not remove from bezel.

Rotate the ceramic indices until the printed logo is at the desired position. You may need to screw the bezel and indices assembly back onto the handle body to check alignment and adjust as necessary.

When you are happy with the position, re-tighten the brass plate, making sure to hold the ceramic indices still.

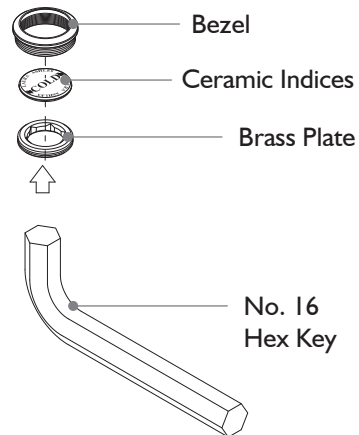

Customer Services

Laura Ashley Bathrooms, Brassmill Lane Trading Estate, Bath BA1 3JF

Tel: 01225 303 900 | Fax: 01225 448 877


Email: info@lauraashleybathroomcollection.com Web: www.lauraashleybathroomcollection.com

Manufactured by Roper Rhodes under license for Laura Ashley Ltd.

LAURA ASHLEY HOME

CLIFTON BASIN MIXER WITH POP-UP WASTE

INSTALLATION & AFTERCARE INSTRUCTIONS

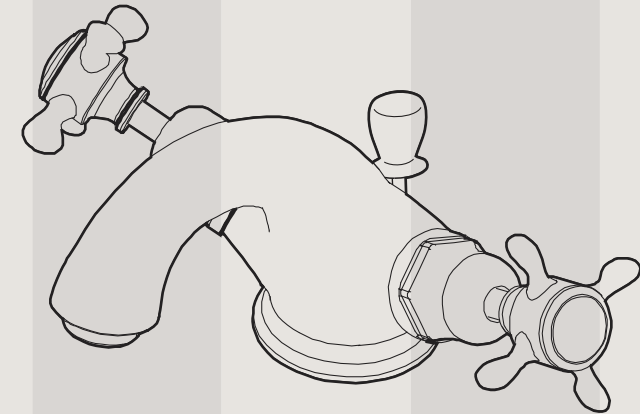

LA1016

RETAIN FOR FUTURE REFERENCE

CLIFTON BASIN MIXER WITH POP-UP WASTE

INSTALLATION & AFTERCARE INSTRUCTIONS

LAURA ASHLEY
HOME

INSTALLATION PROCEDURE

- 1) Prior to installation flush out the pipe work to remove debris and then ensure the water supply is turned off.
- 2) Refer to diagram and ensure all components are present.
- 3) Fit the flexible tail hoses into the base of the basin mixer body using an appropriate spanner. Make sure you do not over tighten. Insert the pop-up waste lever through the hole behind the spout.
- 4) Insert the rubber washer into the bottom of the basin mixer and place over the basin tap hole. Secure on the underside using the horseshoe washer, horseshoe plate and securing bar in the order shown. Do not overtighten as this may damage the basin.
- 5) Connect the pop-up waste mechanism as indicated in the diagram. The pop-up rod connector should be adjusted to allow for a smooth operation. The base of the plug should also be adjusted to allow it to open sufficiently for waste water to escape. Do not adjust such that the waste sits too high in the open position as this may cause the mechanism to stick. Ensure the basin seal sits between the upper part of the waste and the inside of the basin. The waste washer should be positioned on the underside of the basin.
- 6) Connect the water supply to the flexible hoses, making sure the hot supply is connected to the left hose (flexible hose 1 in the diagram).
- 7) Fully open both hot and cold taps and allow to run for approximately 1 minute to fully flush the system.
- 8) Check all connections for leaks.

AFTERCARE INSTRUCTIONS

Whilst the item has a high quality durable finish, it should nevertheless be treated with care. Surfaces should be cleaned only using a soft damp cloth and clean water and dried using a soft cotton cloth. Bath cleaning products, even non scratch ones could damage the finished surface.

10 YEAR GUARANTEE

We have complete confidence in this Laura Ashley product and as such it is offered with a 10-year guarantee against defects in manufacture. The guarantee requires that this product be used in the manner for which it was intended and that it is installed and maintained in accordance with the fitting instructions and local water bylaws. The guarantee covers products in domestic use only. The guarantee is invalidated should the valve be damaged by water borne debris. Make sure that supply pipes are clear of any debris prior to installation, this is particularly important on new plumbing installations. In the unlikely event that this product should fail during the guarantee period we will either replace the faulty part or the complete unit as appropriate.

