

ADJUSTING HANDLE ALIGNMENT


To adjust the alignment of the handle in relation to the body, unscrew the bezel and ceramic indices from the top of the handle.

Unscrew the spindle bolt, and set aside with the spindle bolt washer.

Lift the handle off the spindle and replace at the desired angle using the micro adjustment teeth.

Re-attach the washer and spindle bolt and tighten.

Screw the bezel and ceramic indices assembly back onto the handle body.

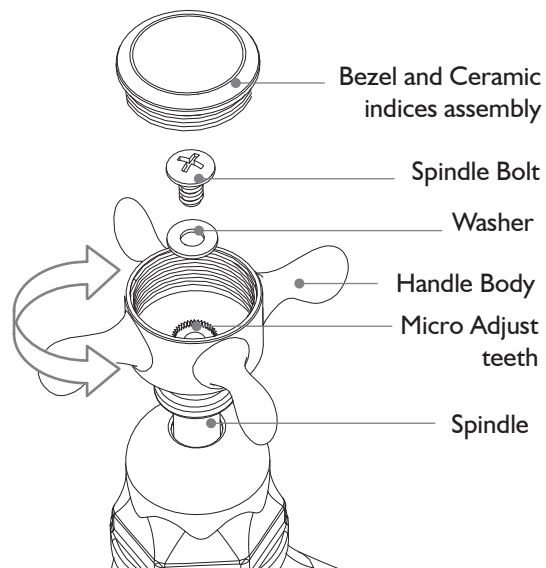


ADJUSTING CERAMIC INDICES

To adjust the alignment of the ceramic indices, first unscrew the bezel and ceramic indices assembly from the tap handle.

The ceramic indices are held in place by a threaded brass plate. Loosen the brass plate with a No. 16 Hex (Allen) Key, but do not remove from bezel.


Rotate the ceramic indices until the printed logo is at the desired position. You may need to screw the bezel and indices assembly back onto the handle body to check alignment and adjust as necessary.

When you are happy with the position, re-tighten the brass plate, making sure to hold the ceramic indices still.

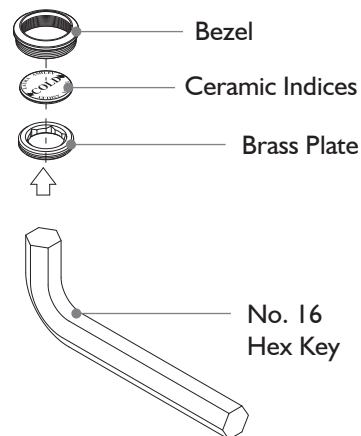

LAURA ASHLEY HOME

CLIFTON PILLAR MOUNTED BATH SHOWER MIXER INSTALLATION & AFTERCARE INSTRUCTIONS

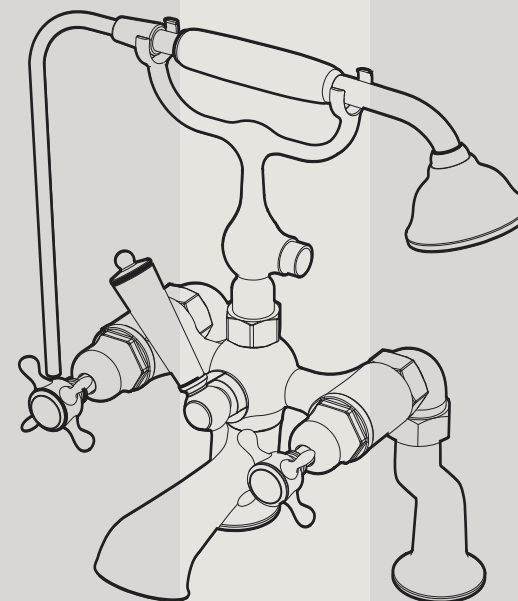

LA1018

RETAIN FOR FUTURE REFERENCE

Customer Services

Laura Ashley Bathrooms, Brassmill Lane Trading Estate, Bath BA1 3JF

Tel: 01225 303 900 | Fax: 01225 448 877

Email: info@lauraashleybathroomcollection.com Web: www.lauraashleybathroomcollection.com

Manufactured by Roper Rhodes under license for Laura Ashley Ltd.

CLIFTON PILLAR MOUNTED BATH SHOWER MIXER

INSTALLATION & AFTERCARE INSTRUCTIONS

LAURA ASHLEY
HOME

INSTALLATION PROCEDURE

- 1) Prior to installation flush out the pipe work to remove debris and then ensure the water supply is turned off.
- 2) Refer to diagram and ensure all components are present.
- 3) Fit the legs to the bath filler body making sure the large sealing washers provided are used at each of the shoulder joints.
- 4) Fit the Handset cradle to the main body using the medium sized sealing washer provided. Attach the hose to the cradle and to the handset using the small sealing washers provided at both ends.
- 5) Fit the bath shower mixer to the bath ensuring the rubber washer and fixing nut are on the underside of the bath.
- 6) Connect to the water supply ideally applying PTFE tape on the threads to form a watertight seal. The hot water supply should always be connected to the left hand leg.
- 7) Fully open both valves and allow to run for approximately 1 minute to fully flush the system.
- 8) Turn the diverter handle to the right to activate the shower handset and check the water flow.
- 9) Check all connections for leaks, ensuring all seals are in place and the shoulder joint collars are fully tightened.

AFTERCARE INSTRUCTIONS

Whilst the item has a high quality durable finish, it should nevertheless be treated with care. Surfaces should be cleaned only using a soft damp cloth and clean water and dried using a soft cotton cloth. Bath cleaning products, even non scratch ones could damage the finished surface.

10 YEAR GUARANTEE

We have complete confidence in this Laura Ashley product and as such it is offered with a 10-year guarantee against defects in manufacture. The guarantee requires that this product be used in the manner for which it was intended and that it is installed and maintained in accordance with the fitting instructions and local water bylaws. The guarantee covers products in domestic use only. The guarantee is invalidated should the valve be damaged by water borne debris. Make sure that supply pipes are clear of any debris prior to installation, this is particularly important on new plumbing installations. In the unlikely event that this product should fail during the guarantee period we will either replace the faulty part or the complete unit as appropriate.

