
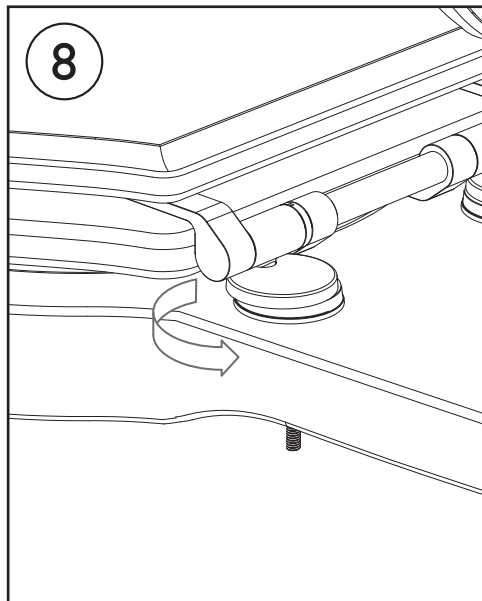
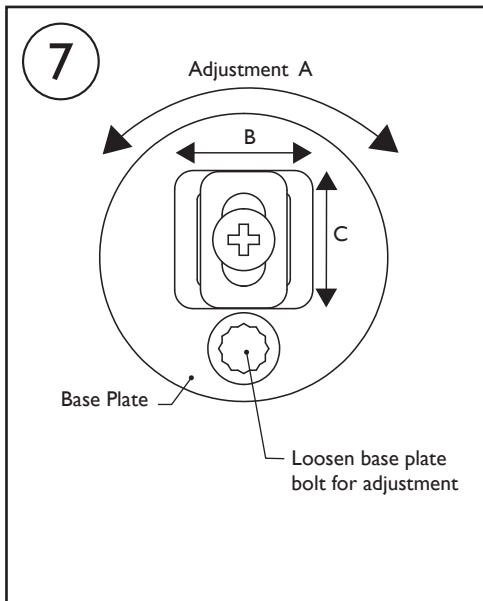
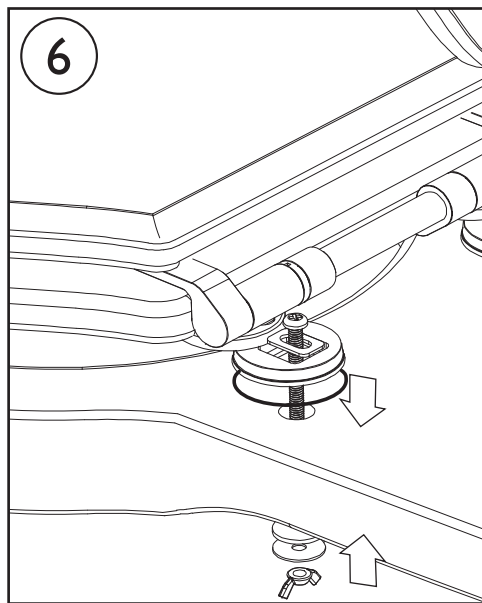


TOP FIX

BOTTOM FIX

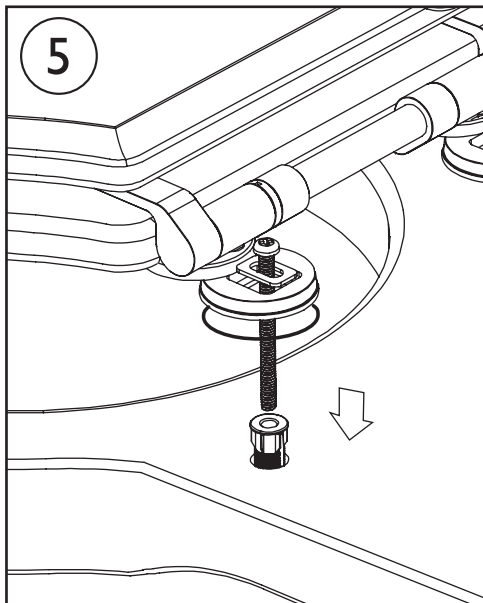

Customer Services

Laura Ashley Bathrooms, Brassmill Lane Trading Estate, Bath BA1 3JF

Tel: 01225 303 900 | Fax: 01225 448 877

Email: info@lauraashleybathroomcollection.com Web: www.lauraashleybathroomcollection.com


Manufactured by Roper Rhodes under license for Laura Ashley Ltd.

REF: PL.LA. | 04.13 V1.00

LAURA ASHLEY HOME

SOFT CLOSE WOODEN TOILET SEAT

INSTALLATION & AFTERCARE INSTRUCTIONS

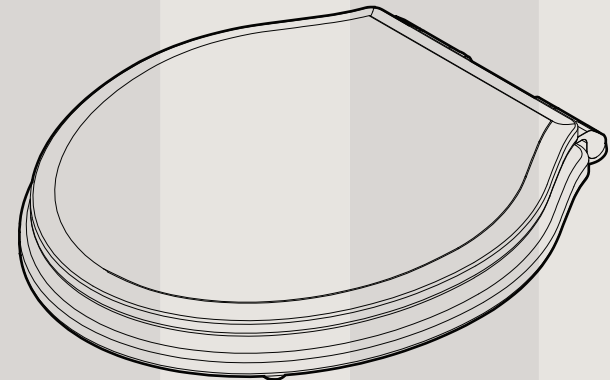

LA9139 • LA9140 • LA9147

RETAIN FOR FUTURE REFERENCE

SOFT CLOSE WOODEN TOILET SEAT

INSTALLATION & AFTERCARE INSTRUCTIONS

INSTALLATION PROCEDURE

- 1) The seat comes with parts for two fixing options: Top Fix and Bottom Fix. (see fig 1).
- 2) To use Top Fix, the lower section of the top fix insert must protrude through the underside of the pan deck. (see fig 2). If the pan is too thick then use the bottom fix components .
- 3) Once you have determined the fixing method, rotate the base plate covers and base plates to the desired position by loosening the base plate bolts (see fig 3).The holes in the base plates have stepped profiles to allow you to attach them to the hinge in a number of positions. Do not tighten the bolts fully at this point.
- 4) Offer the seat up to the toilet pan and check whether the fixing holes on the top of the pan line up with the square holes in the base plates and the seat lines up with the overall profile of the pan (see fig 4). If they do not line up adjust the base plate's position using the stepped hole until the seat fits the pan correctly. Once you are happy with the position, tighten the base plate fixing bolts fully. Note: it is important that you use the serrated washers between the base plate and base plate bolts.
- 5) If using top fix, insert the top fix inserts into the pan fixing holes and press in firmly. Make sure the rubber o-rings are in the bottom of each base plate. Insert the rectangular washers and fixing bolts through each base plate and screw into the fixing bolts inserts. As you tighten the bolt , the underside of the fixing bolt insert will expand and pull tight against the underside of the pan. Do not overtighten at this point.
- 6) If you are using the bottom fix method, make sure the rubber o-rings are in the bottom of each base plate then insert the rectangular washers and fixing bolts. Pass the bolts through the pan fixing holes and screw on the conical washers, metal washers and wingnuts as shown (see fig 6). Do not overtighten at this stage.
- 7) Further adjustments can be made to the seat's position by adjusting the position on the fixing bolts and washers relative to the base plates. (see fig 7 - adjustment B & C). If the seat is still not aligned properly follow the instructions in step 4 again to adjust the base plate (adjustment A).
- 8) Once you are happy with the seat's position fully tighten the fixing bolts and swivel the base plate covers over the base plates and push down to secure. Note you may need to lift the seat to an upright position to move the covers.

AFTERCARE INSTRUCTIONS



Clean surfaces with a soft damp cloth and mild soap solution



Do not use bleach or abrasive/corrosive cleaning agents on the seat



Do not scrub or scour



Do not stand on the lid or ring of your toilet seat

If using bleach or abrasive/corrosive cleaning agents inside the toilet bowl, ensure that these do not come into contact with the seat. Keep the seat in an upright position until all cleaning solution has been flushed away.

LAURA ASHLEY
HOME

