

AFTERCARE INSTRUCTIONS

Whilst the item has a high quality durable finish, it should nevertheless be treated with care. Surfaces should be cleaned only using a soft damp cloth and clean water and dried using a soft cotton cloth.

Bath cleaning products, even non scratch ones could damage the finished surface.

10 YEAR GUARANTEE

We have complete confidence in this Laura Ashley product and as such it is offered with a 10-year guarantee against defects in manufacture. The guarantee requires that this product be used in the manner for which it was intended and that it is installed and maintained in accordance with the fitting instructions and local water bylaws. The guarantee covers products in domestic use only. The guarantee is invalidated should the valve be damaged by water borne debris. Make sure that supply pipes are clear of any debris prior to installation, this is particularly important on new plumbing installations. In the unlikely event that this product should fail during the guarantee period we will either replace the faulty part or the complete unit as appropriate.

Customer Services

Laura Ashley Bathrooms, Brassmill Lane Trading Estate, Bath BA1 3JF


Tel: 01225 303 900 | Fax: 01225 448 877

Email: info@lauraashleybathroomcollection.com Web: www.lauraashleybathroomcollection.com

Manufactured by Roper Rhodes under license for Laura Ashley Ltd.

LAURA ASHLEY HOME

YORK DECK MOUNTED BATH SHOWER MIXER INSTALLATION & AFTERCARE INSTRUCTIONS

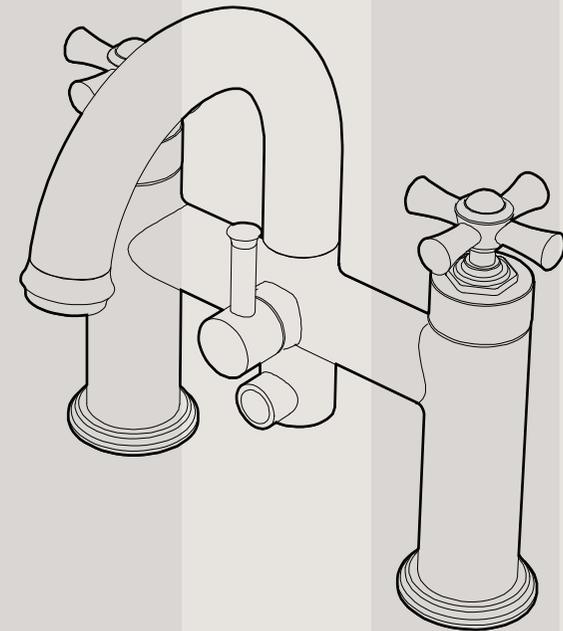

LA1013

RETAIN FOR FUTURE REFERENCE

YORK DECK MOUNTED BATH SHOWER MIXER

INSTALLATION & AFTERCARE INSTRUCTIONS

LAURA ASHLEY
HOME

INSTALLATION PROCEDURE

- 1) Prior to installation flush out the pipe work to remove debris and then ensure the water supply is turned off.
- 2) Refer to diagram and ensure all components are present.
- 3) Fit the bath filler to the bath ensuring the rubber washer and fixing nut are on the underside of the bath.
- 4) Connect to the water supply ideally applying PTFE tape on the threads to form a watertight seal. The hot water supply should always be connected to the left hand leg.
- 5) Fully open both valves and allow to run for approximately 1 minute to fully flush the system.
- 6) Check all connections for leaks.
- 7) Attach the end of the shower hose with the large nut shaped fitting to the bottom of the diverter valve. The other end should be attached to the shower head (see diagram).
- 8) Establish the desired position for the shower head wall-mounting bracket. Check that the bracket is oriented correctly & that the shower head will reach by placing it temporarily in position. Caution: Before drilling, check for hidden power cables and pipes. Take care using power tools, especially near water. The use of a residual current device (RCD) is recommended.
- 9) Drill a single 8mm hole in the desired position for the shower head mounting bracket and insert the supplied nylon plug into the hole.
- 10) Disassemble the wall mounting bracket by unscrewing the cover cap from the cover plate and insert the supplied screw through the centre of the cover plate and screw into the wall, making sure the O-ring is placed between the wall and cover plate. Re-assemble the bracket in the order shown and place the shower head in position.

