


LAURA ASHLEY HOME

YORK SIDE ACTION BASIN MIXER WITH CLICK WASTE INSTALLATION & AFTERCARE INSTRUCTIONS

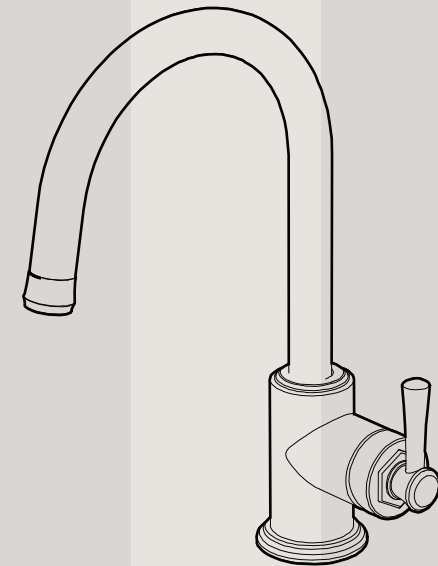

LA1011

RETAIN FOR FUTURE REFERENCE

Customer Services

Laura Ashley Bathrooms, Brassmill Lane Trading Estate, Bath BA1 3JF

Tel: 01225 303 900 | Fax: 01225 448 877

Email: info@lauraashleybathroomcollection.com Web: www.lauraashleybathroomcollection.com

Manufactured by Roper Rhodes under license for Laura Ashley Ltd.

YORK SIDE ACTION BASIN MIXER WITH CLICK WASTE

INSTALLATION & AFTERCARE INSTRUCTIONS

INSTALLATION PROCEDURE

- 1) Prior to installation flush out the pipe work to remove debris and then ensure the water supply is turned off.
- 2) Refer to diagram and ensure all components are present.
- 3) Fit the flexible tail hoses into the base of the basin mixer body using an appropriate spanner. Make sure you do not over tighten.
- 3) Attach the shorter threaded end of both threaded bars into their locations in the base of the basin mixer. The bottom of the threaded bars have a cross head screw drive slot. Use a small Phillips screw-driver to tighten the threaded bars to the mixer body.
- 4) Place the base plate and o-ring between the basin mixer body and the tap hole. Secure on the underside using the rubber horseshoe washer, metal horseshoe washer and fixing nuts in the order shown. Do not overtighten as this may damage the basin.
- 4) Connect the water supply to the flexible hoses, making sure the hot supply is connected to the left hose (flexible hose 1 in the diagram).
- 5) Fully open the taps and allow to run both hot and cold for approximately 1 minute to fully flush the system.
- 6) Check all connections for leaks.

CLICK WASTE INSTALLATION

- 1) Fit the upper rubber washer to the waste body and insert the assembly into the basin waste hole as shown. On the underside attach the second rubber washer, metal washer and fixing nut in the order shown.
- 3) Firmly screw the fixing nut tight to the basin. Care must be taken however to not overtighten, which could crack the basin. Check to ensure there are no leaks when the basin is filled with water. Silicone sealant can be applied to the underside of the upper rubber washer for an additional seal if necessary.

AFTERCARE INSTRUCTIONS

Whilst the item has a high quality durable finish, it should nevertheless be treated with care. Surfaces should be cleaned only using a soft damp cloth and clean water and dried using a soft cotton cloth. Bath cleaning products, even non scratch ones could damage the finished surface.

10 YEAR GUARANTEE

We have complete confidence in this Laura Ashley product and as such it is offered with a 10-year guarantee against defects in manufacture. The guarantee requires that this product be used in the manner for which it was intended and that it is installed and maintained in accordance with the fitting instructions and local water bylaws. The guarantee covers products in domestic use only. The guarantee is invalidated should the valve be damaged by water borne debris. Make sure that supply pipes are clear of any debris prior to installation, this is particularly important on new plumbing installations. In the unlikely event that this product should fail during the guarantee period we will either replace the faulty part or the complete unit as appropriate.

LAURA ASHLEY
HOME

