



## Affinity power module

Affinity module offers the convenience of power and data at the desktop when you need it and an uncluttered work surface when you don't. It is a concealed unit that can function in the open or closed position.

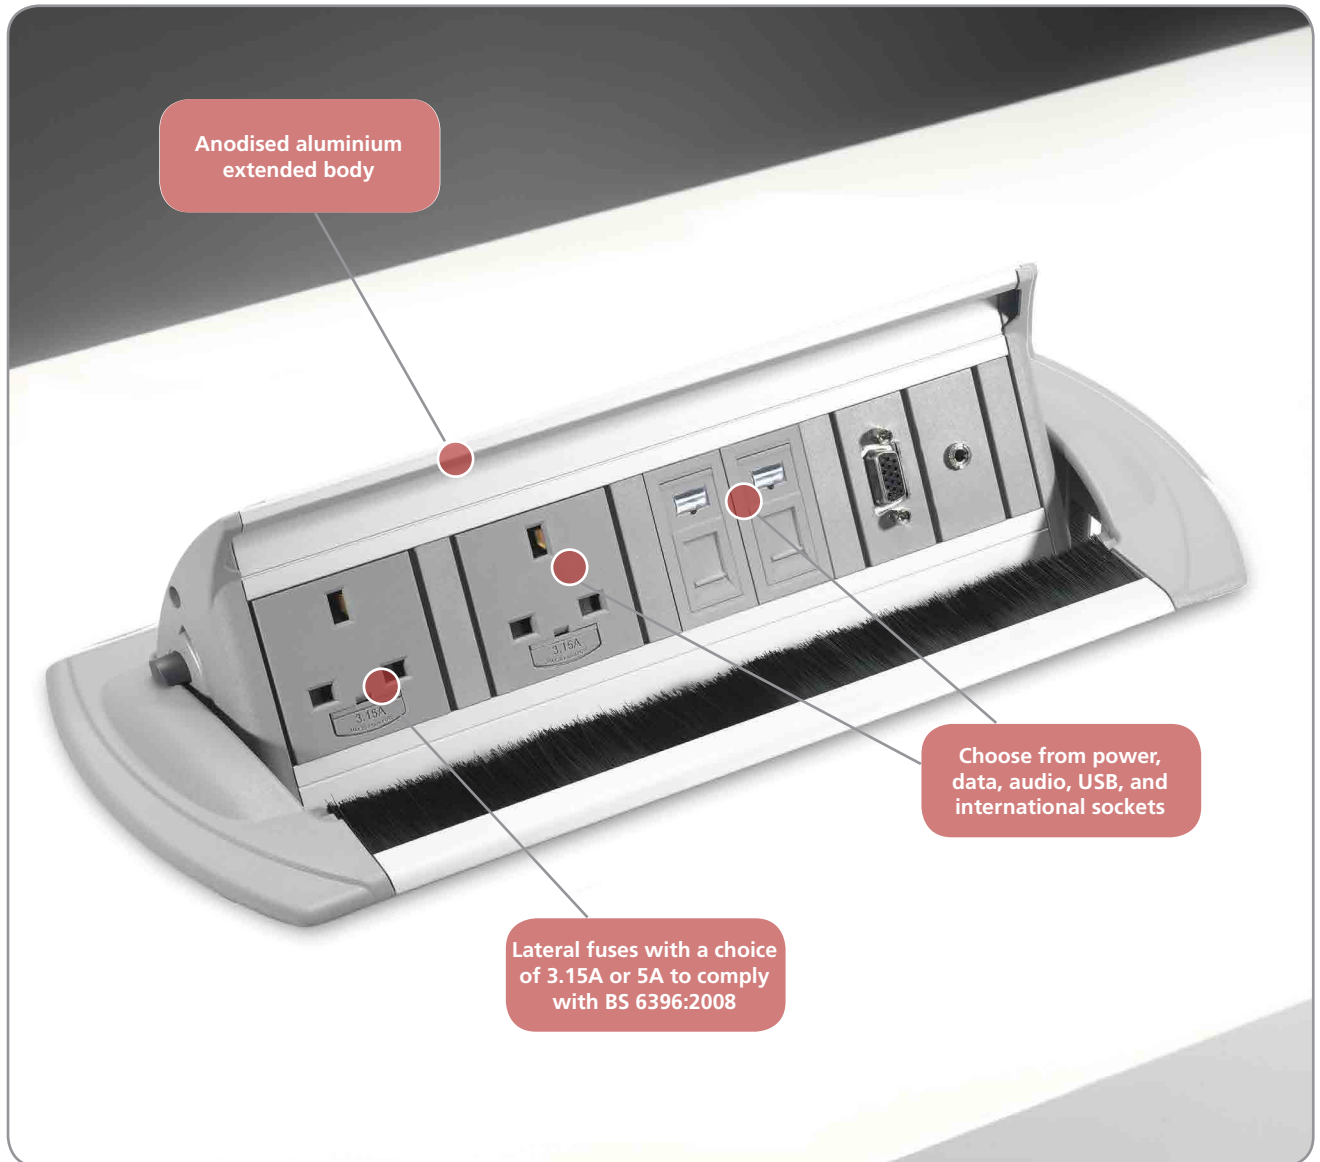

- Unit has grey fascia end caps and an anodised aluminium body. Fascia is Vø flame retardant ABS with grey socket fascias
- Clamps into rectangular location hole using ratchet clamps
- Power and data cables all exit from under the side of the unit
- All UK power socket versions feature individual fuses
- Choice of 3.15A or 5A fuses are available to comply with BS 6396:2008
- Unit complies with BS 5733
- All standard options are supplied with a 3m mains lead to 13A UK plug and 3m data lead where relevant

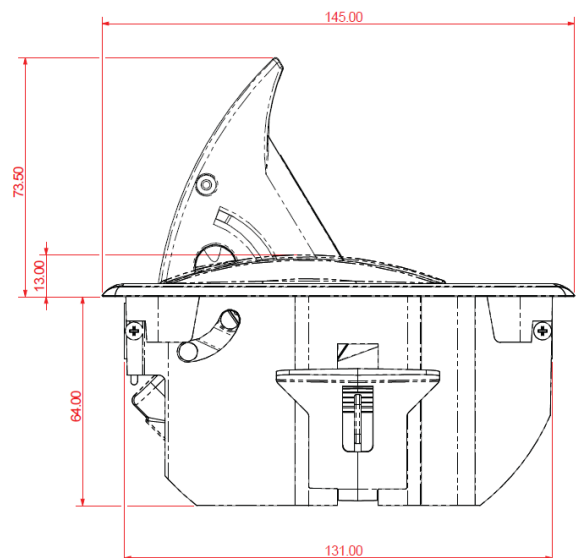

# power module *Affinity*



## Manage your energy

Configure Affinity to allow energy to be monitored and controlled with Footprint. See page 89 for more details.



Flush Position



## Build it your way

Affinity is available with the following modification. Contact us with your required specification for a quote on **+44 (0)1709 829 511**.

### UK Sockets:

UK NS/ Ang Fused & Unfused  
Round Earth NS / Ang Fused & Unfused  
T' Earth NS Fused & Unfused

### International Sockets:

American IEC C13  
Australian IEC C19  
Brazilian (Euro) Indian  
French/Belgium Italian  
German Japanese  
Swiss

### In-Feeds

Hard Wired Mains Cable 1.5mm  
Hard Wired Mains Cable 2.5mm  
Wieland Tail 1.5mm  
Hard Wired SY Cable 1.5mm  
Hard Wired SY Cable 2.5mm  
Conduit - Plastic

### Data, Telecommunications, AV:

3.5mm Audio Phono  
9 Pin D Data RJ11 Tel Shuttered  
BT Tel Shuttered RJ45 Cat5e  
Co Axial RJ45 Cat6  
Ethernet BNC HDMI  
USB S Video  
SVGA

### Circuit Protection, Switching, Indication:

Ammeter Neon Indicator  
Filter RCBO  
MCB RCD  
Varistor  
Switch - Double Pole (16A Max Supply)  
Switch - Single Pole (16A Max Supply)

Code	Description
85PG01	<b>2 x power sockets</b> 3.15A individually fused, supplied with 3m mains to 13A UK plug <i>Product Cutout Dimensions: 132mm x 161.5mm*</i>
85PG03	<b>4 x power sockets</b> 3.15A individually fused, supplied with 3m mains to 13A UK plug <i>Product Cutout Dimensions: 132mm x 286.5mm*</i>
85UG01	<b>2 x power sockets, 2 x RJ45 Cat5e data sockets</b> 3.15A individually fused, supplied with 3m mains to 13A UK plug and 3m data leads <i>Product Cutout Dimensions: 132mm x 286.5mm*</i>
85U271	<b>4 x power sockets, 2 x RJ45 Cat5e data sockets</b> 3.15A individually fused, supplied with 3m mains to 13A UK plug and 3m data leads <i>Product Cutout Dimensions: 132mm x 361.5mm*</i>
85HG01	<b>2 x power sockets, 2 x RJ45 Cat5e data sockets, 1 x 15 pin SVGA socket, 1 x 3.5mm stereo jack</b> 3.15A individually fused, supplied with 3m lead to 13A UK plug, 3m data leads, 3m lead to 15 pin SVGA plug and 3m lead to 3.5mm stereo plug <i>Product Cutout Dimensions: 132mm x 299mm*</i>
85HG02	<b>2 x power sockets, 2 x RJ45 Cat6 data sockets, 1 x 15 pin SVGA socket, 1 x 3.5mm stereo jack</b> 3.15A individually fused, supplied with 3m lead to 13A UK plug, 3m data leads, 3m lead to 15 pin SVGA plug and 3m lead to 3.5mm stereo plug <i>Product Cutout Dimensions: 132mm x 299mm*</i>

NB Please note that Cat 6 is backwards compatible. CMD cannot accept any responsibility or liability for providing category 5e or 6 performance in products supplied. We will however fit category 5e or 6 specification components where specified. \*Dimensions are meant as a guide and have a +/- 1mm tolerance.

**Please note:** Fuses only accessible after removal of equipment plug. Lead lengths shown will be the conductor length and not the distance from the end of the module to the plug. For example, a 3m prewired power lead will be approximately 2.875m as 125mm will be internal for the termination, this is also applicable for data leads.

Data fascias may be subject to colour change.