

# Figure


## 700 Wall Mounted Unit FIG7011.x

R2

Please retain for future reference


### Before you start

It is recommended that all units and basins are secured to a suitably reinforced wall to ensure stability. Wall plugs supplied are only suitable for solid stone / brick wall. For plasterboard walls use specialist wall plugs, if in any doubt please consult an expert. Wear suitable eye protection when drilling. Take care when using power tools near water - the use of a residual current device (RCD) is recommended. Beware of hidden pipes or cables. Take care when drilling tiled surfaces as the drill might slip. Use a piece of masking tape to prevent the drill from wandering.

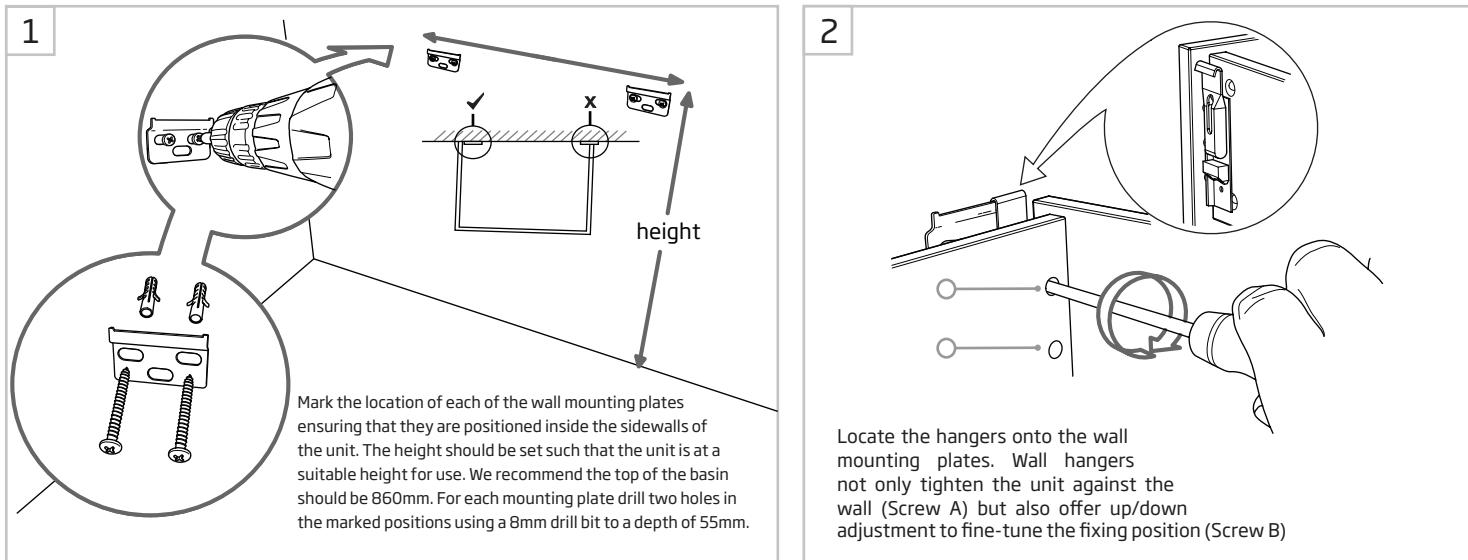

### Fascia Adjustment

Fascias may require adjustment for correct alignment. This is achieved with the adjusting mechanisms shown in diagrams 3 and 4.

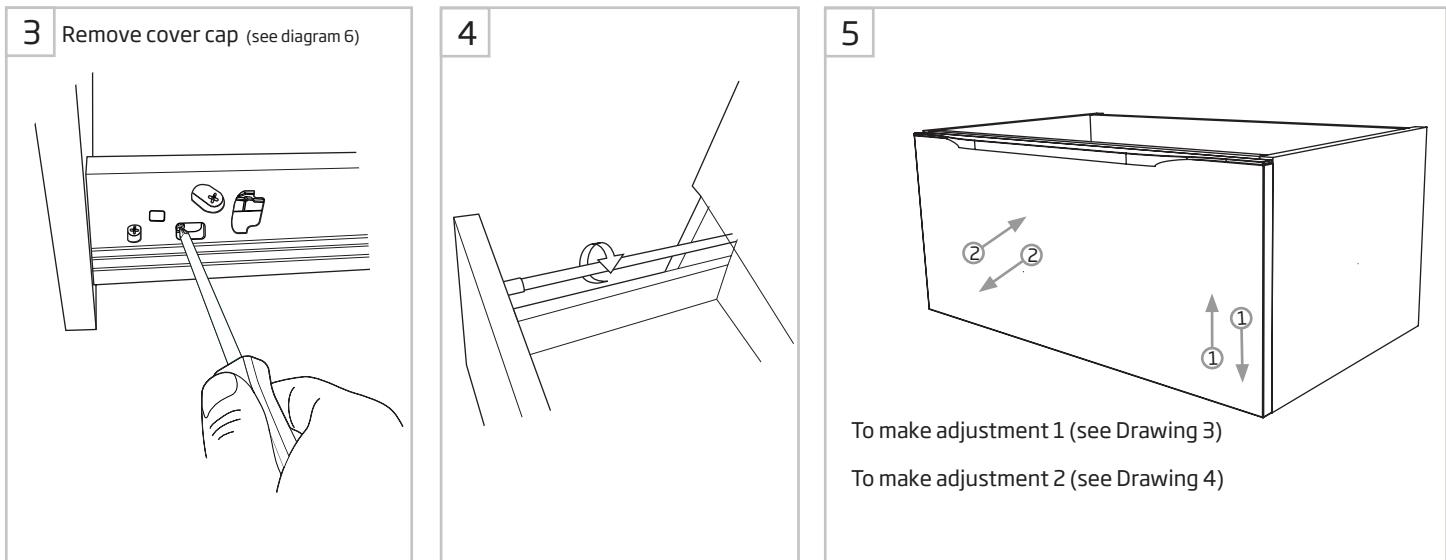

### Furniture Aftercare Instructions

As with all wooden furniture, this product should be treated with care.

#### We recommend...

Wipe away any water splashes or condensation after use. Excessive exposure to water will deteriorate the furniture.

All bathrooms should be well ventilated with a suitable extractor fan.

Clean with a soft damp cloth only.

Use a wax free polish if one must be used.

For removal of lime scale deposits use a suitable proprietary cleaner. If necessary test on an inconspicuous area first.

#### Please DO NOT...

Do not scrub or scour

Do not use abrasive cleaning agents

Replacement components - Should you require any replacement components for this product please contact R2 using the contact details below.

# Figure

## 600 Wall Mounted Unit FIG7011.x


Please retain for future reference

R2


### Removing the fascias

If faulty or damaged, the fascias can be removed and replaced. To remove the Fascias please follow the instructions below:


- 6 Remove the rectangular cap.

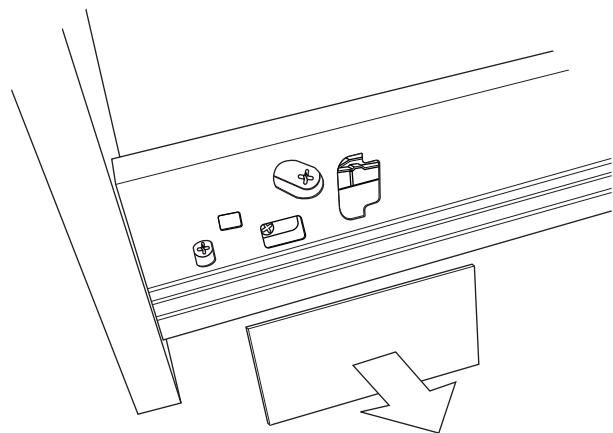


- 8 Gently slide the drawer outwards and upwards to remove fully from runner.

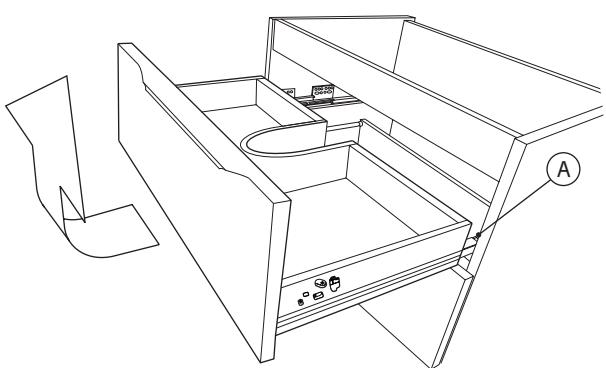


- 7 Squeeze the lever on each side of the drawer to release from runner.

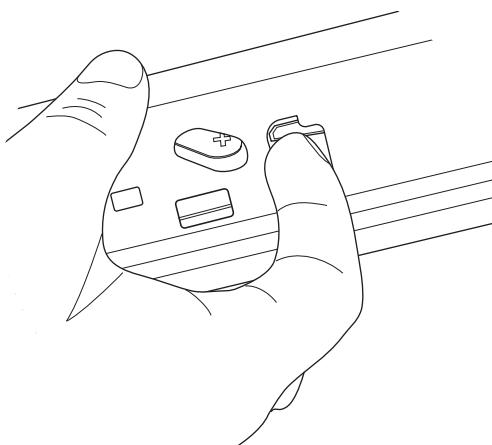


- 9 Unscrew the CAM screw on the underside of the drawer.

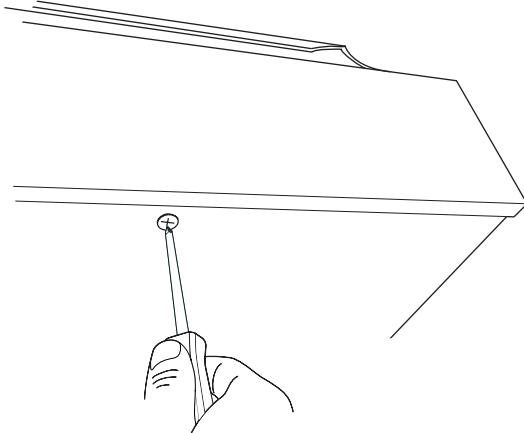


- 10 Release the fascia using a screwdriver.

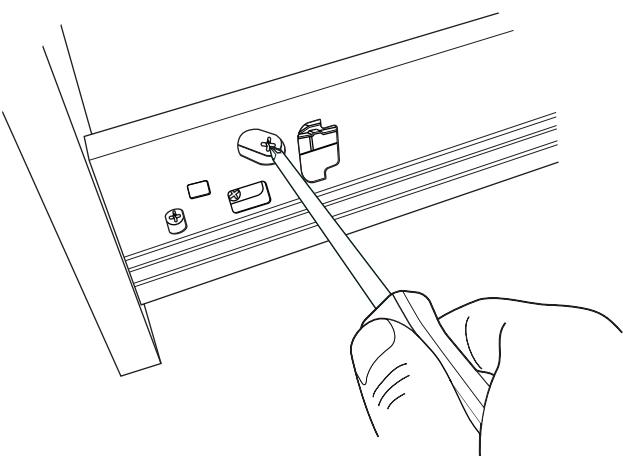

- 11 Pull the fascia away from the body of the drawer. Note: For the bottom drawer release the adjustment rail first (see diagram 12).

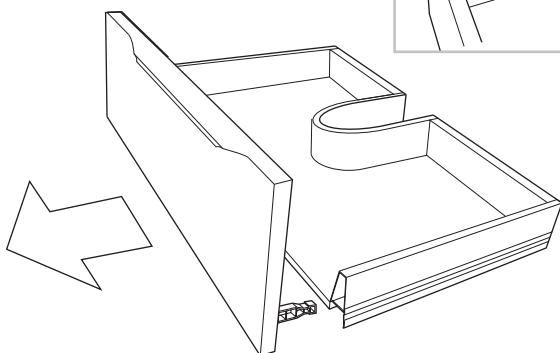

- 12

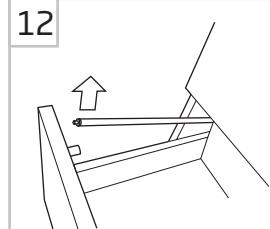

NOTE - When replacing the draws back on their runners ensure they have been 'clicked' back into position at point A in diagram 8 (on both sides)

# Figure

## 700 Wall Mounted Unit FIG7011.x

R2

Please retain for future reference

### Installation of Vessel Basin, Tap and Worktop


Either tall taps or wall mounted taps should be used with the FIGVCR1 (R2 vessel basin). Please ensure that the position of the basin and tap is such that the water flow will fall into a suitable position in the bowl.

Place the basin on the worktop and choose desired location making sure that waste and trap are positioned over the U cutout in the drawer. If mounting a tall tap, mark the desired location of the tap hole in the worktop also. Cut the waste hole large enough for the waste nut to fit through. Cut a hole for the tap plumbing, taking care that it is large enough for the plumbing connections but smaller than the tap base.

Connect the basin, worktop, waste and trap in the order shown in the diagram to the right, ensuring the waste is tightly fixed to the basin before positioning the basin on the worktop. If using FIGVCR1 an open unslotted waste should be used. For any other basins please seek advice from the supplier.

The basin should then be sealed to the worktop using silicone sealant (not supplied).

Finally the worktop should be sealed to the furniture using silicone sealant.

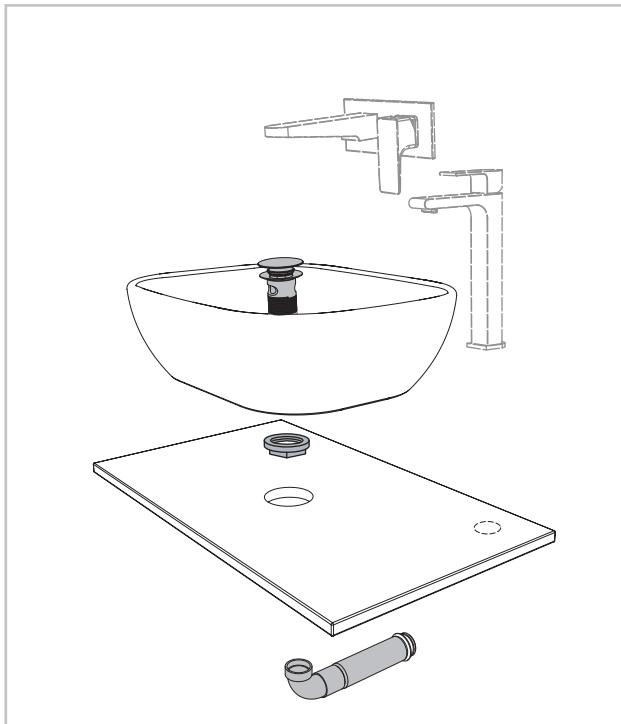

### Basin & Worktop Cleaning Instructions

#### Ceramic basin

For ceramic vessel basins use a soft damp cloth and wipe down any excess surface dirt after each use. This will prevent the ceramic surface from being stained or damaged. Avoid using abrasive cleaning materials / liquids.

#### Solid worktops

For solid surface items dirt can be removed with a soft cloth. You may occasionally require a mildly abrasive cleaning product. Never use petroleum-based products when cleaning, i.e. paint thinners or other solvents, as these may damage the solid surface material. Any spillages of other liquids should be cleaned immediately to prevent surface staining.

Should the surface become scratched or damaged, the following steps can be taken to repair the surface:

- For small damages / marks the supplied 800/1000 sanding sponge can be used to lightly sand and polish them out.
- For larger dents / scratches - sand the affected area using a 240 grit sandpaper, followed by a 400 grit sand paper and an 800 grit sandpaper.
- When the surface damage is no longer visible finish by polishing the surface using a cloth and white polishing compound such as the one used for automobiles.