


# Toilet Seat Fitting Instructions & Product Care

**Please read carefully before attempting to fit the seat. If you are not the end user, please make sure the aftercare instructions are made available for the end user to read.**

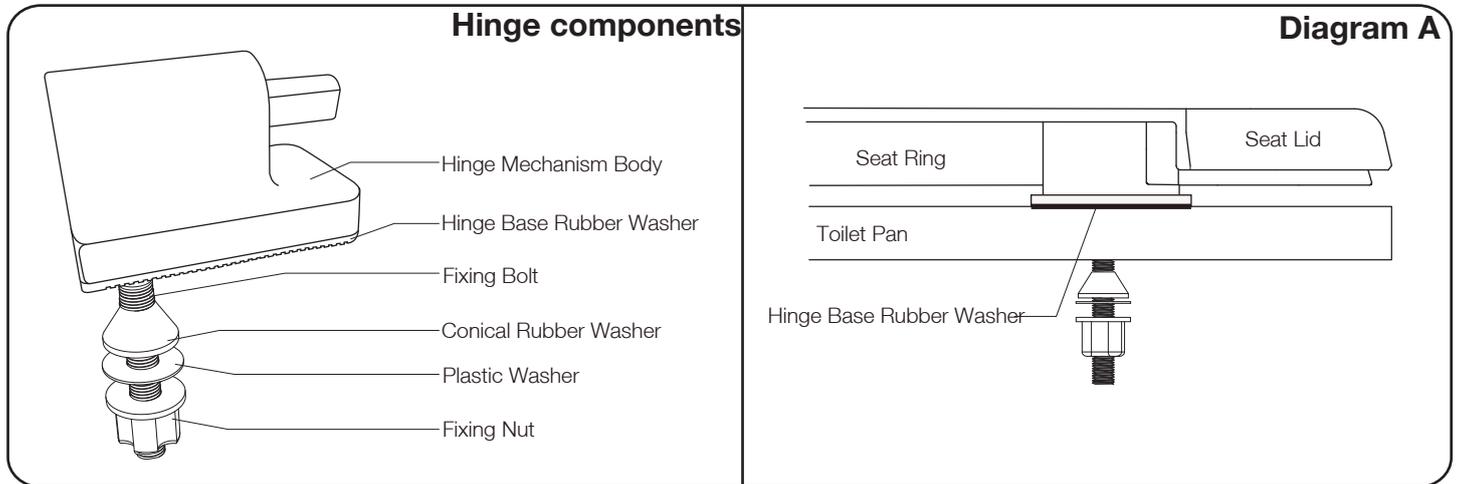

## A. Adjusting the seat hinges


**IMPORTANT** - It is essential that the hinge mechanism is fitted to the correct mounting points on the seat. Failure to do so will result in damage to the hinge. To ensure correct fitting, both the mechanism and the seat are marked with left (L) and right (R) labels. Make sure that the labels on each item are matched (see DIAG B overleaf).

In order to fit the seat correctly it is essential to adjust the seat hinges. The fixing bolt on the hinge is attached to a sliding plate on the underside of the hinge mechanism body. This sliding plate allows left / right adjustment. The fixing bolt can also be moved inside this sliding plate allowing forward / backward adjustment. This combined sliding action allows a wide range of fixing positions, necessary in order to match the distance between the 2 holes in the toilet pan and to adjust the forward /backward position of the seat.

## B. Bolting the seat to the pan (see DIAG A)

It is essential that:

- 1.** All washers are fitted as in DIAG A. Note that the hinge base rubber washer which slots into the hinge mechanism body must be fitted prior to inserting fixing bolts into toilet pan.
- 2.** The wing nuts are tightened properly. Failure to adequately tighten the wing nuts may result in the seat moving around on the pan - care must be taken however not to over tighten the nuts as this could result in damaging the toilet pan. After a few days use check the nuts are still tight - this is necessary as the washers will slowly compress in the first few days of use. If the seat lid or ring will not stay in the raised position then move it further forward on the pan.

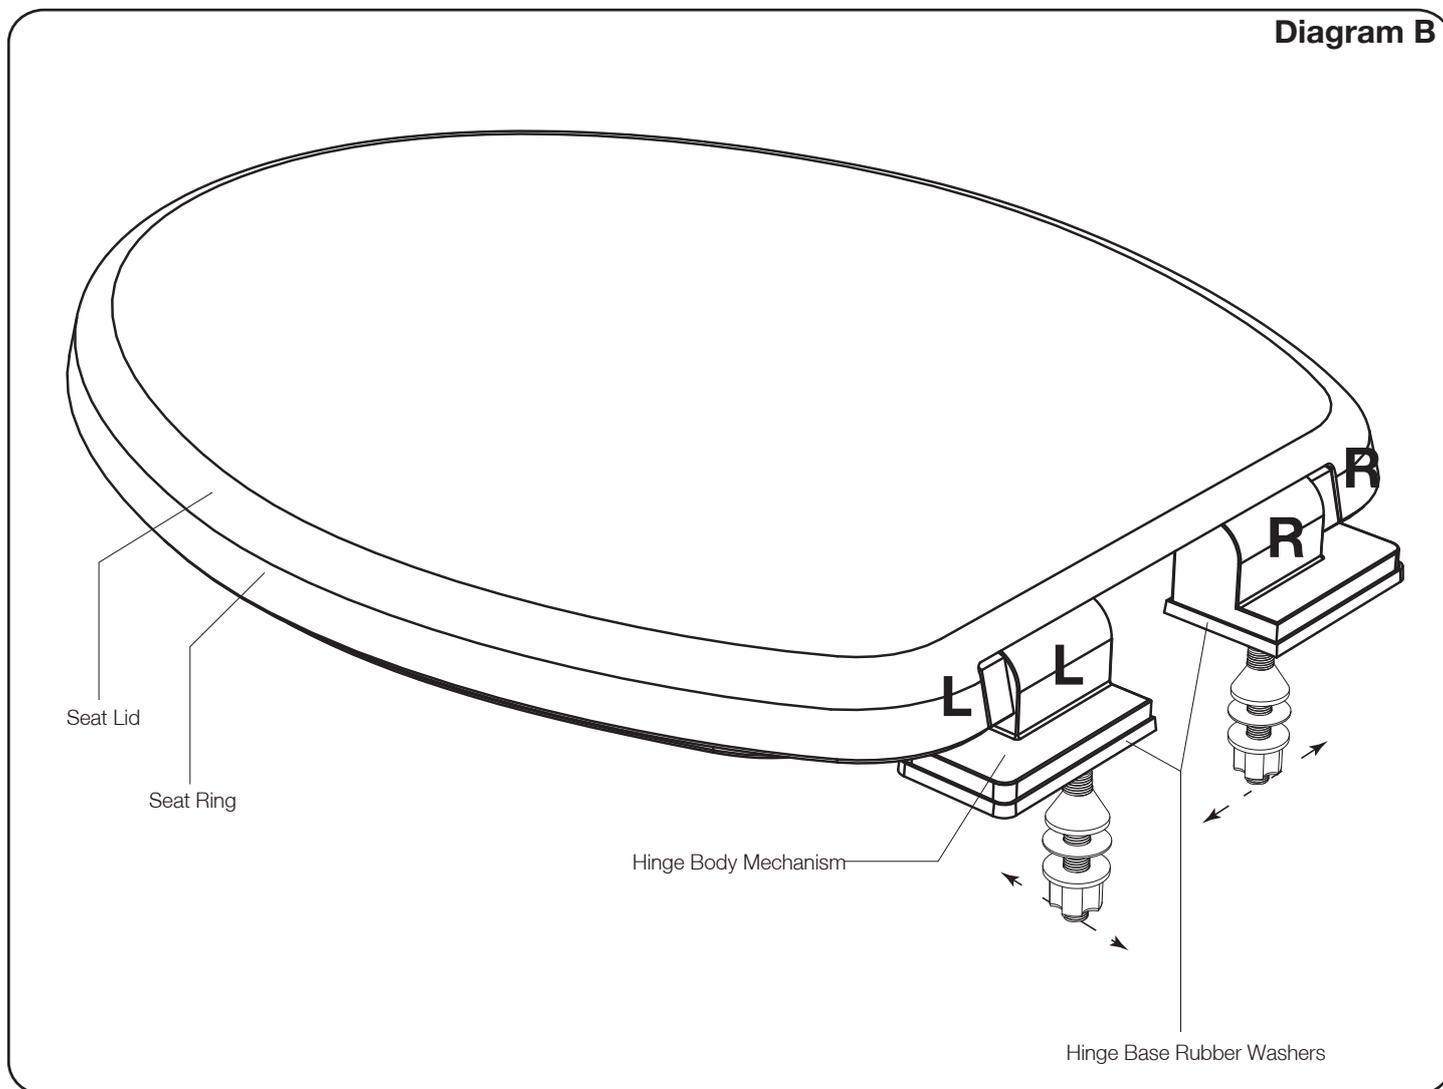

#### D. Basic Principle of Toilet Seat & Hinge Mechanism

It is essential that you have installed your Roper Rhodes toilet seat as shown in DIAG D, with the corresponding hinge mechanisms in the correct position as indicated.

### AFTERCARE INSTRUCTIONS

This toilet seat has a very hardwearing finish. The seat should however be treated with care.

1. Clean the surfaces weekly with a soft damp cloth and mild soap solution.
2. Do not use neat bleach, powder cleaners or cream cleaners.
3. Do not scour or scrub the surface.
4. Replacement hinges, fixings, washers and seat buffers can be obtained directly from Tavistock at the address below. If possible please quote the seat product code in all correspondence.
5. WARNING - do not stand on the lid or ring of your toilet seat (for example when decorating the bathroom).

Tavistock  
 Brassmill Lane Trading Estate,  
 Bath,  
 BA1 3JF  
 Tel: 01225 787870 | Fax: 01225 448877 | Email: [tavistock@roperrhodes.co.uk](mailto:tavistock@roperrhodes.co.uk) | Web: [www.tavistock-bathrooms.co.uk](http://www.tavistock-bathrooms.co.uk)