

## AFTERCARE INSTRUCTIONS

Whilst this item has a high quality durable finish, it should nevertheless be treated with care. Surfaces should be cleaned using only a soft damp cloth and clean water & dried using a soft cotton cloth. Bath cleaning products, even non-scratch ones could damage the finished surface.

## 5-YEAR GUARANTEE

We have complete confidence in this Tavistock product and as such it is offered with a 5-year guarantee against defects in manufacture. The guarantee requires that this product be used in the manner for which it was intended and that it is installed & maintained in accordance with the fitting instructions and local water byelaws. The guarantee covers products in domestic use only. The guarantee is invalidated should the valve be damaged by water borne debris. Make sure that supply pipes are clear of any debris prior to installation, this is particularly important on new plumbing installations. In the unlikely event that this product should fail during the guarantee period we will either replace the faulty part or the complete unit as appropriate.



## KINETIC

**BASIN TAPS** (pair)

**BATH TAPS** (pair)



Customer Services, Tavistock, Units 2 & 3, The Maltings Industrial Estate, Bath, BA1 3JL

TEL: 01225 787870 | FAX: 01225 448877

Email: [tavistock@roperrhodes.co.uk](mailto:tavistock@roperrhodes.co.uk) | Web: [www.tavistock-bathrooms.co.uk](http://www.tavistock-bathrooms.co.uk)



*Tavistock is a division of Roper Rhodes Limited*

---

Installation & Aftercare Instructions

Please retain for future reference

---

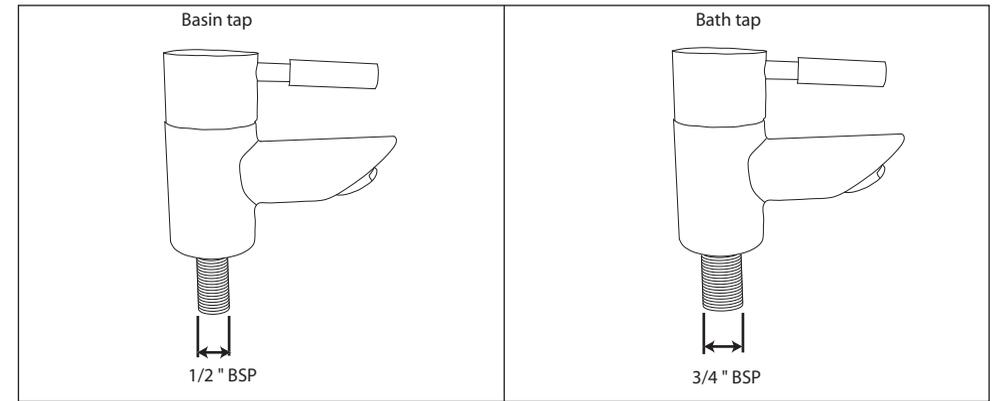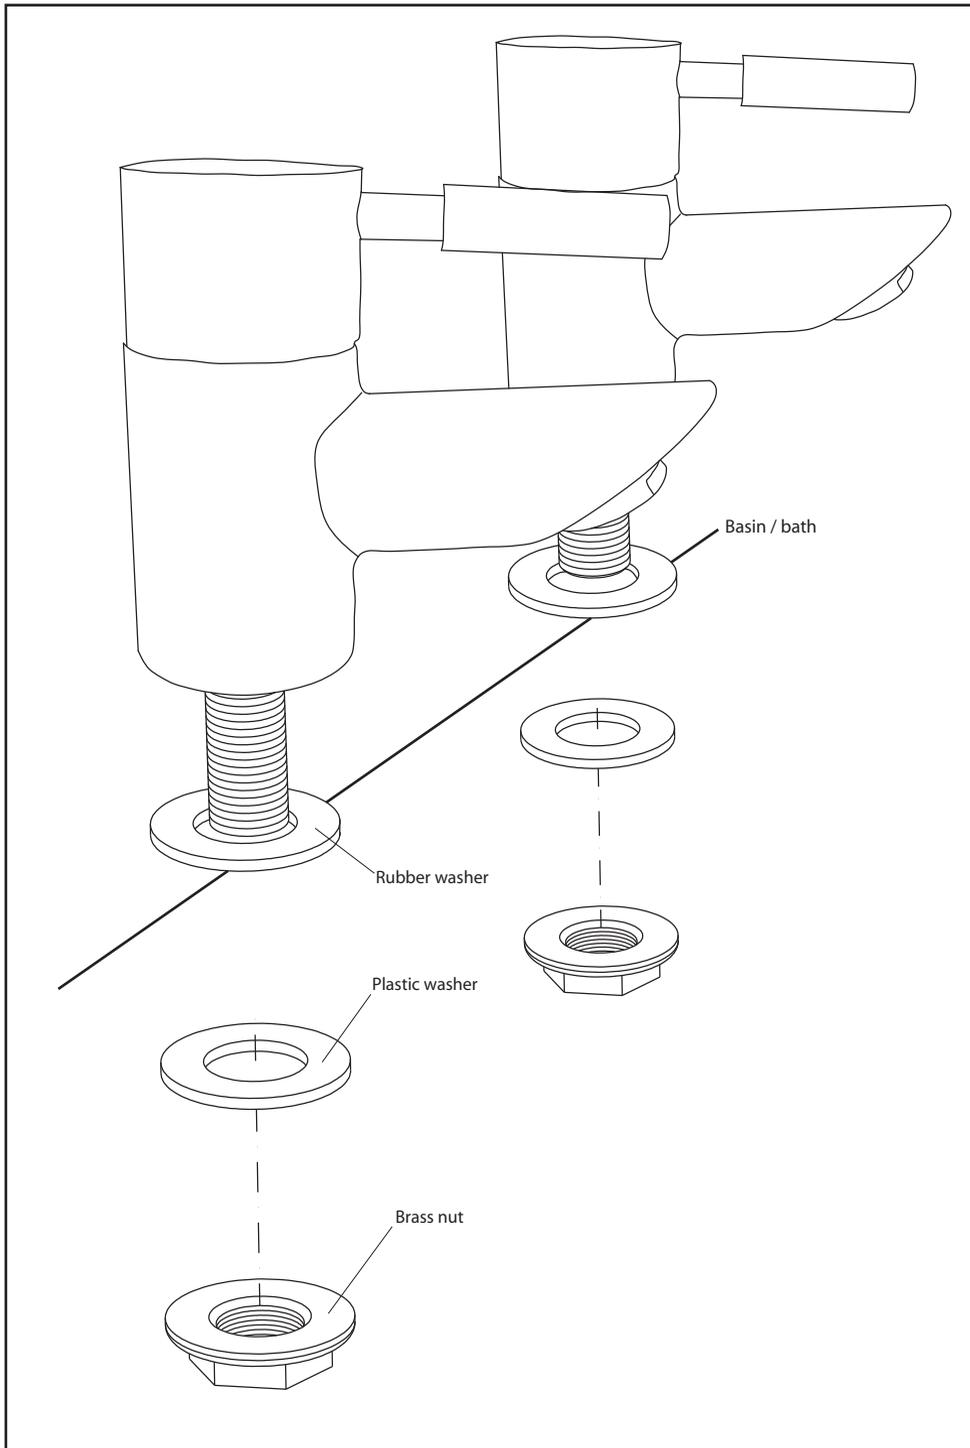

### INSTALLATION PROCEDURE

1. Prior to installation flush out the pipe work to remove debris & then ensure that the water supply is turned off.
2. Refer to diagram & check that all components are present.
3. Install both taps onto the basin in the sequence shown in the diagram using the rubber washers and brass nuts provided.
4. Connect the water supply. The hot supply should always be connected to the left hand tap.
5. Fully open both taps & allow water to run for approximately one minute to further flush the system.
6. Check all connections for leaks.

### GENERAL NOTES

These taps should be installed in accordance with water regulations. Approved check valves should be fitted where required. For further details please contact your local water authority.