

AFTERCARE INSTRUCTIONS

Whilst this item has a high quality durable finish, it should nevertheless be treated with care. Surfaces should be cleaned using only a soft damp cloth and clean water & dried using a soft cotton cloth. Bath cleaning products, even non-scratch ones could damage the finished surface.

5-YEAR GUARANTEE


We have complete confidence in this Tavistock product and as such it is offered with a 5-year guarantee against defects in manufacture. The guarantee requires that this product be used in the manner for which it was intended and that it is installed & maintained in accordance with the fitting instructions and local water bylaws. The guarantee covers products in domestic use only. The guarantee is invalidated should the valve be damaged by water borne debris. Make sure that supply pipes are clear of any debris prior to installation, this is particularly important on new plumbing installations. In the unlikely event that this product should fail during the guarantee period we will either replace the faulty part or the complete unit as appropriate.

TAVISTOCK
inspiring bathrooms

BATH MONO MIXER Installation & care instructions

Please retain for future reference


KINETIC
TKN92

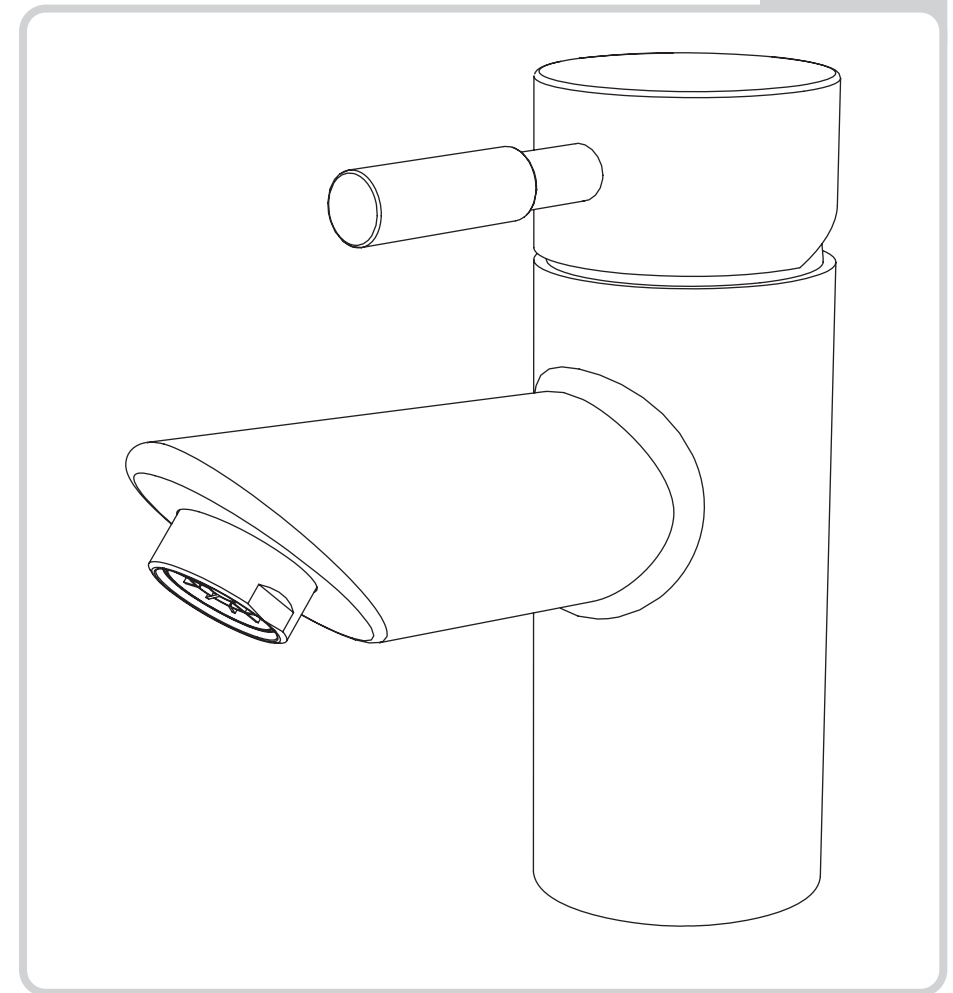

TAVISTOCK
inspiring bathrooms

Customer Services, Tavistock, Brassmill Lane Trading Estate, Bath, BA1 3JF
T. 01225 787870 | F. 01225 448877
E. tavistock@roperhodes.co.uk | W. www.tavistock-bathrooms.co.uk

REF: NH.TAV.BMM | 02.09 V1.00

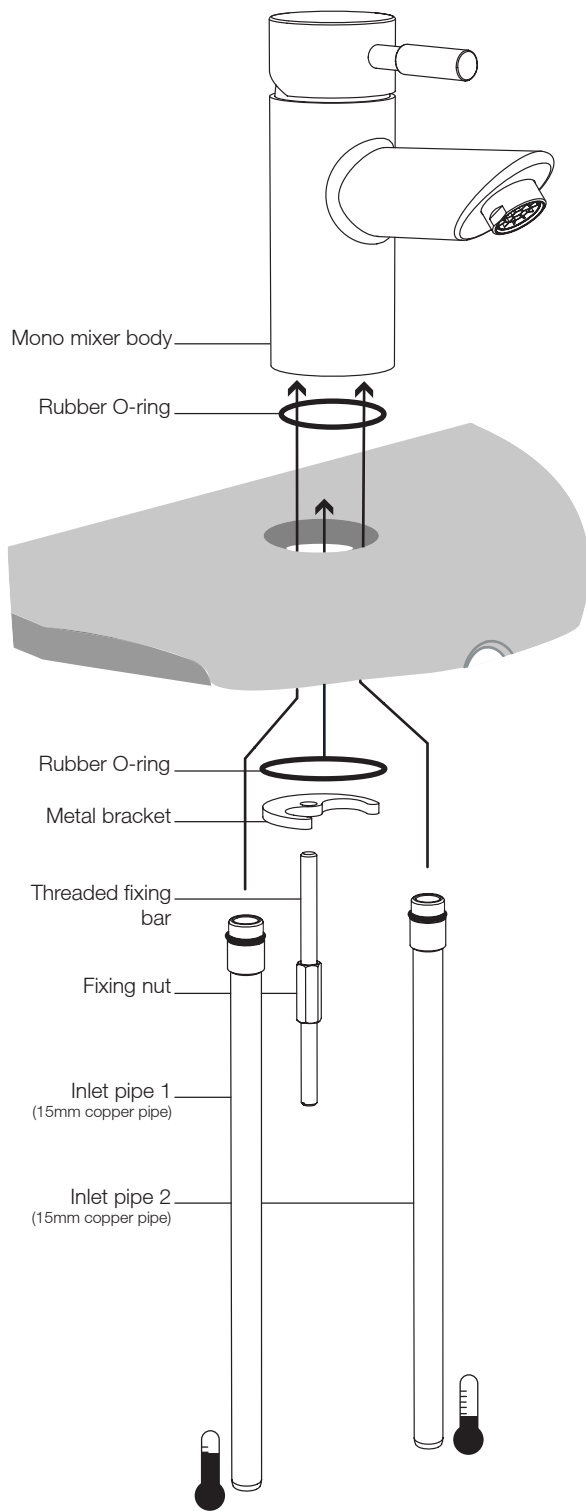

INSTALLATION PROCEDURE:

- 1.** Prior to installation flush out the pipe work to remove debris & then ensure that the water supply is turned off.
- 2.** Some baths are supplied without tap / mixer holes. In this case decide on a location to mount the mixer and check there is adequate room and access to make the required connections beneath the bath. If not already available cut a 40mm diameter hole on the bath deck.
- 3.** Refer to diagram & check that all components are present.
- 4.** Fit the inlet pipes to the mixer body.
- 5.** Screw the threaded fixing bar into its location inside the mixer body.
- 6.** Fit the mixer body to the bath using the supplied rubber bracket, metal bracket and fixing nut in the order indicated in the drawing. DO NOT over-tighten as this may damage the bath. Remember to install the O-ring between the mixer body & the bath.
- 7.** Connect the water supply to the supply pipes using suitable connection components for 15mm copper pipe. Hot supply should always be connected to the left supply pipe (Inlet pipe 1 in the diagram).
- 8.** Fully open mixer on both hot & cold sides & allow water to run for approximately one minute to further flush the system.
- 9.** Check all connections to ensure there are no leaks.

GENERAL NOTES

This mixer should be installed in accordance with water regulations. Approved check valves should be fitted where required. For further details please contact your local water authority. Should the mixer fail to operate effectively it may be that there is insufficient water pressure. Similarly, hot & cold water supplies should be relatively balanced for optimum performance. A reputable plumber will be able to advise on each of these issues.