


SEEK | EMBRACE

LED replacement INSTRUCTIONS

Please retain for future reference

R2

ILLUMINATED MIRROR
SEEK & EMBRACE

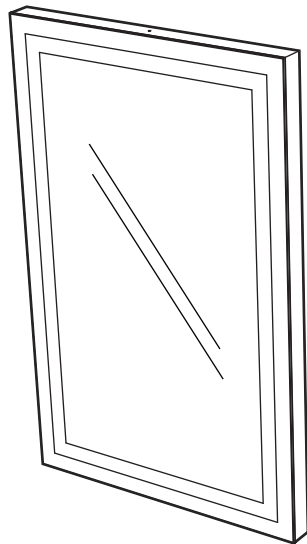

Available Spares

SEEK Mirror LED Strip - SP15359
EMBRACE Mirror LED Strip - SP14132
SEEK & EMBRACE LED DRIVER - SP13728

Before You Start

Before attempting to change any of the electrical components on this mirror, ensure that the mirror is completely disconnected from any electrical supply.

Replacement Installation Instructions

This installation procedure will require a second person to hold the mirror while it is being disconnected from the electrical supply.

1) Remove the mirror from the wall. This is done by lifting it off the keyhole slots. At this stage the electrical connections on the back of the mirror should be disconnected.

2) Lay the mirror flat so the back of the mirror is facing upwards. Ensure the flat surface it is resting on does not scratch the mirror. Remove the back panel of the mirror.

3) See the diagram for the labelling of components inside the mirror.

The LED strip runs around the outside of the mirror. To replace this, unplug the original LED strip and remove from the mirror. Take the replacement LED strip and plug it in to the mirror. Starting at the top of the mirror, stick the self adhesive LED strip to the LED mounting plates, removing the adhesive tape as you go. This will prevent the LED strip sticking to anything else.

Replace the back of the mirror with all of the screws once the new part is installed.

4) Reconnect the mirror to the electrical supply. Remount the mirror on the wall. Ensure the mirror is mounted securely.

THIS PRODUCT IS MANUFACTURED TO CLASS I
CATEGORY AND MUST HAVE AN EARTH CONNECTION.

Colour Coding:
L - Live = Brown
N - Neutral = Blue
⊕ - Earth = Green & Yellow

Strip wires to a suitable
length. DO NOT connect
to a plug & socket outlet.

! IF IN DOUBT CONSULT YOUR ELECTRICIAN !

